



PITBULL

Compact Loader X-Series



PRODUCTSHEETS | 2022-01

Diesel | Tyre Sheet



2022-01

PITBULL

Index

You can easily navigate through the digital price list by clicking on the desired machine on this page.
For a customized quote, please contact our sales team. Thank you for your interest in **Peeters Group**.

Diesel machines

Tyre sheet



2022-01

PITBULL

Compact Loader X-Series



The most powerful, compact and safest of its kind.

The Pitbull Compact Loader is a unique product with extra attention for safety, quality and power. It's a compact and very versatile machine - perfect for big jobs in small areas.

PITBULL

► P-Z boom

Due to the unique construction of the boom with a combination of P- and Z-kinematics the boom has a high breakout force and optimum parallel guidance.

► Rocking axle

The rigid pivoting point in combination with the swiveling rear axle make the Pitbull very stable and suitable for working on uneven surfaces.

► Axles

The very strong 12.000 kg Dana Spicer axles are able to carry over 3 times the weight of the Pitbull. This provides maximum capacity and an extended lifetime of the axles.

► Motor

The 4 cylinder Kubota motor is the heart of the Pitbull.


X SERIES

- Extremely suitable for working in old stables or when low areas have to be passed.
- Extremely suitable for work where safety is guaranteed.
- Also perfectly suitable for gardeners, road construction or other labours where a mini-loader is needed.
- Due to its compact and light weight design the Pitbull is extremely suitable to be used at any location.
- The low weight of the machine makes sure there are no limitations on transport of the machine.
- Available in many different colours.
- Always with 4-point safety roof and telescopic safety brackets.
- Easy to use and very accessible, also for maintenance.
- Only A-components from known brands are used, Kubota, Dana Spicer and Linde, this guarantees A quality.



STANDARD EQUIPMENT

- ▶ 12.000 kg Dana Spicer axles with 45 % differential blocking on the front and rear axle
- ▶ X Series - 26V: Drive motor with fixed stroke volume, X Series - 45/high speed: Variable drive motor
- ▶ Cardan shaft with disc brake
- ▶ Hydrostatic transmission
- ▶ 450 Bar Linde high-pressured system
- ▶ Working hydraulics: max. 50 l/min
- ▶ Hydraulic quick-change
- ▶ IBT cooler
- ▶ ROPS/FOPS safety roof
- ▶ Trelleborg 400/50-15 T463 tyres
- ▶ Painted in Pitbull red, chassis in Pitbull grey
- ▶ Joystick inching

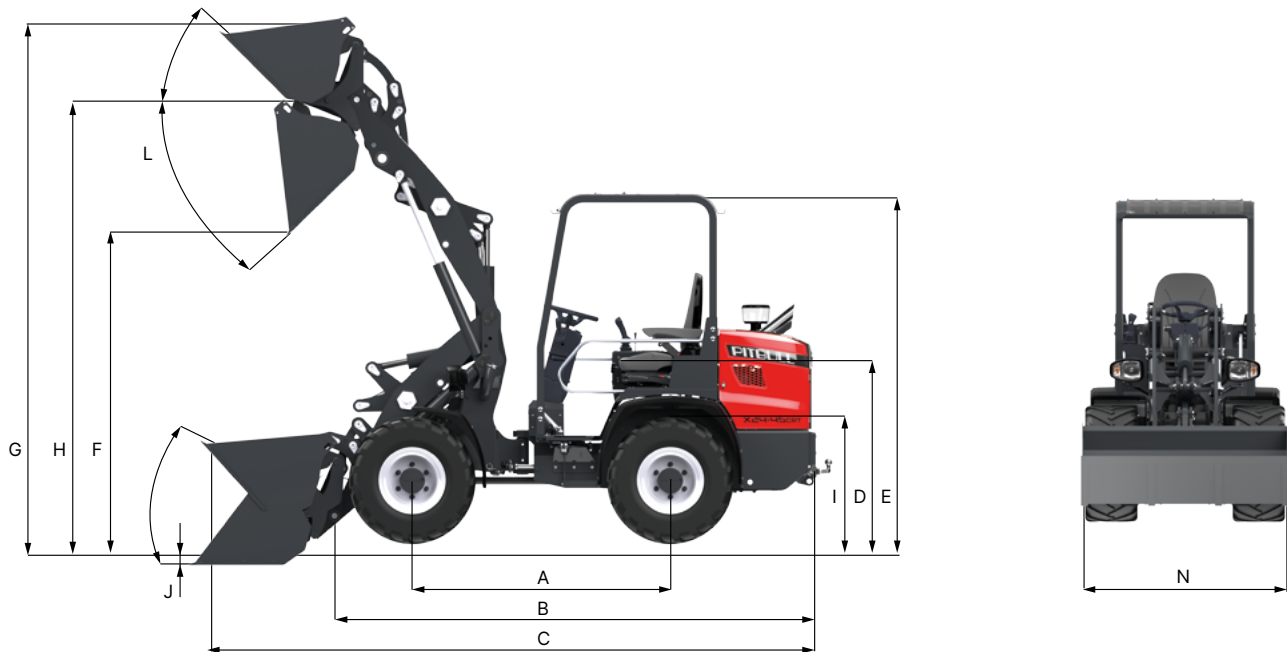

Type	A	B	C	D	E	F	G	H	I	J	K	L	M	N	Weight	Lifting capacity	Outer radius (without bucket)
Weight x 100kg	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	°	°	°	mm	kg	kg	mm
Pitbull X24	1624	3100	3620	1240	2200	2250	3270	2830	800	30	50	38	35	1250/1500	2400	1800	2600
Pitbull X27	1624	3150	3670	1240	2200	2250	3270	2830	800	30	50	38	35	1250/1500	2700	2300	2600
Pitbull X28	1624	3150	3670	1240	2200	2250	3270	2830	800	30	50	38	35	1250/1500	2800	2400	2600



Check our latest price lists for all machine options, available for free at peetersgroup.com/en/pricelists-download



2022-01

PITBULL

Tyres



Find the perfect tyres for your machine

Looking for tyres for your **Pitbull**? Take a look at our options and see which one suits you and the environment in which you use the machine. Supplying a different set of wheels for production is possible if they are approved by the dealer & manufacturer. Other tyres are on request.

For questions, please contact our sales team at **+31 (0)76 504 66 66**
or send an email to sales@peetersgroup.com



Trelleborg
400/50-15 T463

STANDARD

Width tyre 400 mm
Diameter tyre 795 mm
Width machine 1410 mm
ET 0



Alliance
31 x 15.50 - 15 NHS 332

450-908-029

Width tyre 391 mm
Diameter tyre 792 mm
Width machine 1401 mm
ET 0



Mitas 15.5-15 TR 07 TL
109/121A8

450-908-087

Width tyre 370 mm
Diameter tyre 760 mm
Width machine 1380 mm
ET 0



BKT
31x15.50-15
450-908-086

Width tyre 384 mm
Diameter tyre 766 mm
Width machine 1354 mm
ET 0



BKT 280/70R16 Agrimax RT
765 / Alliance 280/70-R16
Agristar 2 serie 70

450-908-088

Width tyre 282 mm
Diameter tyre 798 mm
Width machine 1292 mm
ET 0



Mitas
31.0/15.5-15 SK-02 TL 119A4
450-908-024

Width tyre 384 mm
Diameter tyre 766 mm
Width machine 1434 mm
ET -40



Deestone
31 x 15.50 - 15 D316
450-908-035

Width tyre 391 mm
Diameter tyre 792 mm
Width machine 1401 mm
ET 0



BKT Giant Trax
12-16.5/14PR
450-908-085

Width tyre 315 mm
Diameter tyre 840 mm
Width machine 1425 mm
ET -50



Mitas
31x15.5-15 TR06
450-908-025

Width tyre 370 mm
Diameter tyre 760 mm
Width machine 1460 mm
ET -40



Vredestein
400/60-15.5 Flotation +
450-908-027

Width tyre 410 mm
Diameter tyre 850 mm
Width machine 1420 mm
ET 0



BKT VF400/45R17.5
BKT FL693M
450-908-068

Width tyre 400 mm
Diameter tyre 800 mm
Width machine 1450 mm
ET -20